

# FIREBIRD USB 3.0


## Quad USB 3.0 Host Controller

- 4-Port USB 3.0 Host Controller
- PCIe/104 form-factor
- 2 x PCIe 2.0 (Gen2) x1 interfaces
- Designed for use with USB3 Vision™ cameras

### FEATURES

---

- 4 x USB 3.0 compliant downstream ports.
- Dual full USB 3.0 bandwidth architecture with each channel split into 2 x USB 3.0 ports.
- Based on proven Renesas™ USB 3.0 Host Controller.
- Compliant with USB 3.0 specification Rev.1.0 and Intel xHCI specification Rev. 1.0.
- Support for USB3 Vision cameras.
- Dedicated USB power supply allows for long cables.
- Rugged PCIe/104 form-factor.
- Universal operation: Type 1 or Type 2 hosts.
- Supports stack up or stack down configurations.
- Windows and Linux support.

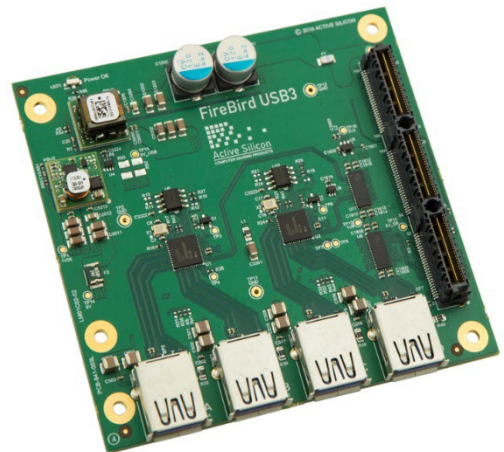

### OVERVIEW

---

The **FireBird Quad USB 3.0 Host Controller** supports four USB 3.0 ports arranged as two ports per host controller with each controller having its own PCI Express 2.0 x1 interface to give a combined total data throughput of 10 Gbps. The USB 3.0 Host Controllers used are the proven Renesas™ μPD720202.

Many USB 3.0 Host Controllers found on motherboards and processor modules share bandwidth with other devices typically resulting in inconsistent performance in demanding applications such as high-speed acquisition from USB3 Vision cameras. The **FireBird Quad USB 3.0 Host Controller** solves this problem by configuring each pair of USB 3.0 ports to use a single lane Gen2 PCI Express interface. Similarly this architecture provides a balance between cost and performance – so that two USB 3.0 devices may operate simultaneously at full bandwidth, or four devices operating simultaneously sharing the combined bandwidth of two full speed links. The board incorporates a dedicated power supply for USB to ensure reliable device operation independent of the main system power supply. The output is set to 5.1V to compensate for voltage drop along long reach USB3 cables.

Software support is based on the proven Renesas™ driver stack which provides the high throughput required by USB3 Vision cameras. Combined with the GenICam standard, these international vision standards in turn provide compatibility with a wealth of third-party applications allowing rapid product development and integration.



## SPECIFICATION SUMMARY

<i>USB 3.0 Interface:</i>	Renesas™ $\mu$ PD720202 USB 3.0 Host Controller supporting the following modes: SuperSpeed (5 Gbps), High Speed (480 Mbps), Full Speed (12 Mbps) and Low Speed (1.5 Mbps).
<i>USB Connectors:</i>	USB 3.0 Type-A connectors.
<i>Power Output:</i>	A dedicated power supply for USB VBUS provides each USB 3.0 port with a nominal 5.1V at 900mA. To cope with very long cables, this voltage can be increased as a hardware option.
<i>PCI Express:</i>	Two single-lane PCIe 2.0 (Gen2) interfaces support a combined total bandwidth of 10 Gbps (5 Gbps per single lane Gen2 interface) from the USB 3.0 Host Controller to the host PC.

## CONFORMANCE

<i>USB 3.0</i>	Compliant with USB 3.0 specification Rev.1.0 and Intel xHCI (eXtensible Host Controller Interface) specification Rev. 1.0.		
<i>PCI Express:</i>	PCI Express Base Specification Revision 2.0.		
<i>PCIe/104</i>	PC/104 Specification for PCIe/104 Revision 2.1.		
<i>Approvals:</i>	EU	CE mark for compliance with EMC EN 55022:2010 (class A) and EN 55024:2010 in accordance with EU directive 2014/30/EU. RoHS compliance to RoHS3 directive 2015/863/EU.	
	USA	EMC FCC Class A. The printed circuit board is manufactured by UL recognised manufacturers and has a flammability rating of 94-V0.	

## PHYSICAL AND ENVIRONMENTAL DETAILS

<i>Dimensions:</i>	PCB: PCIe/104 standard size: 3.8 x 3.6 inches (96.5mm x 91.4mm).		
<i>Weight:</i>	70g		
<i>Power consumption</i>	+3.3V	+5V	Does not include power provided to USB devices. This power is provided from the 12V rail.
<i>(typical):</i>	128mA	90mA	With two USB 3.0 devices connected and running at SuperSpeed (5 Gbps).
<i>Storage Temperature:</i>	-40°C to +85°C.		
<i>Operating Temperature:</i>	0°C to +70°C (ambient environment).		
<i>Relative Humidity:</i>	10% to 90% non-condensing (operating and storage).		



## ORDERING INFORMATION

---

PART NUMBER	DESCRIPTION
AS-FBD-4XUSB3-5-104-2PE2	FireBird Quad USB 3.0 Host Controller interface card.

## THE FIREBIRD RANGE

---

The following products are also available in the range:

- High performance CoaXPress frame grabbers in single, dual and quad configurations.
- Camera Link frame grabbers: Base, Medium, Full and 80-bit (Deca) configurations.

Some variants in the range are also available in non-PC form-factors such as PC/104-Express and CompactPCI Serial.



## CONTACT DETAILS

---

### Headquarters:

Active Silicon Ltd  
1 Waterside Court, Waterside Drive,  
Langley, Berks, SL3 6EZ, UK.

Tel: +44 (0)1753 650600  
Email: [info@activesilicon.com](mailto:info@activesilicon.com)  
Website: [www.activesilicon.com](http://www.activesilicon.com)

### North America:

Active Silicon, Inc.  
479 Jumpers Hole Road, Suite 301,  
Severna Park, MD 21146, USA.

Tel: +1 410-696-7642  
Email: [info@activesilicon.com](mailto:info@activesilicon.com)  
Website: [www.activesilicon.com](http://www.activesilicon.com)

14-Jul-2024