RoHS COMPLIANT

REV	DESC	DATE	APP
C	CHANGE LABEL DIRECTION	2008/12/25	
A	FIRST RELEASE	2007/03/03	
B	UP DATE DRAWING	2008/07/09	

DESCRIPTION CONTROL

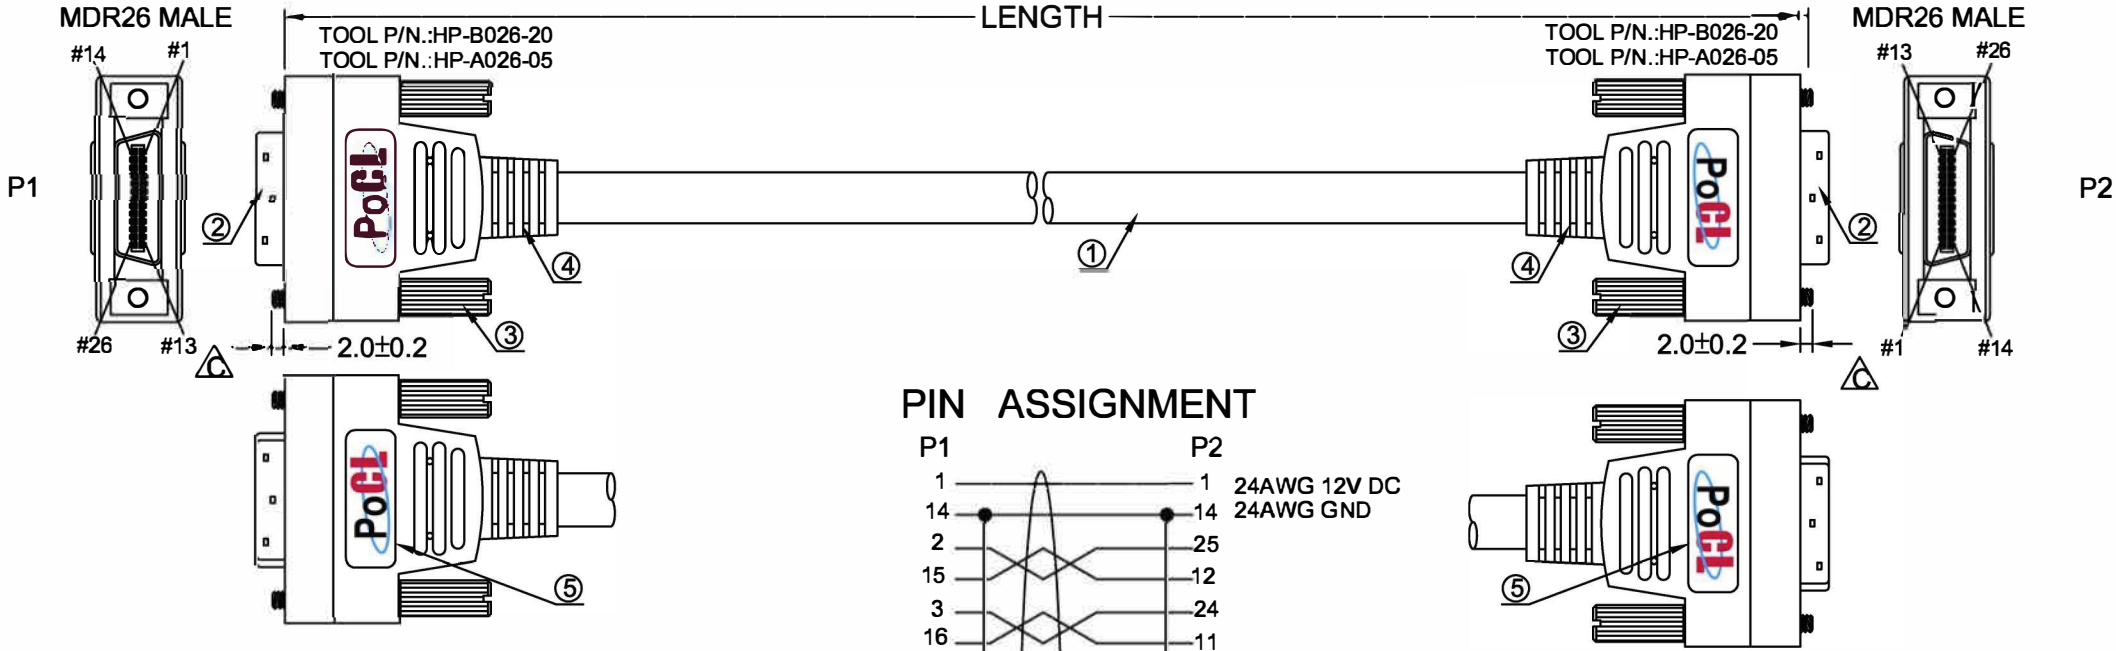

PIN ASSIGNMENT

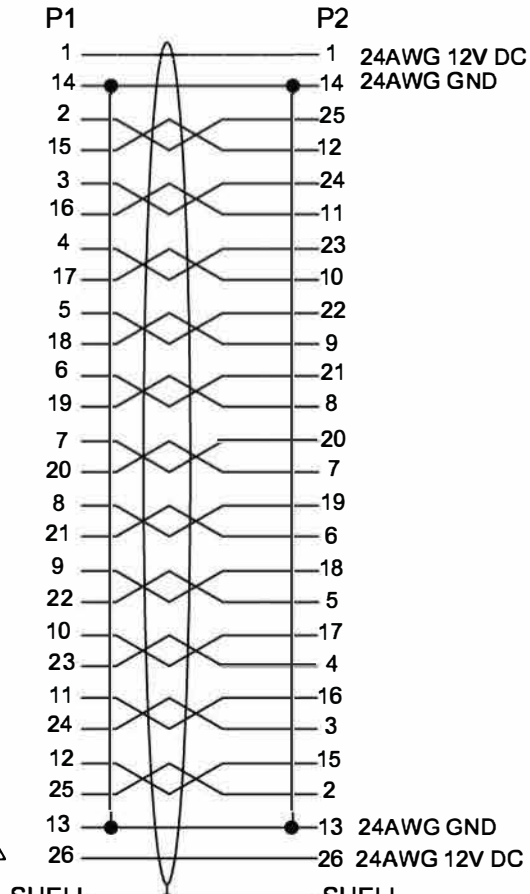

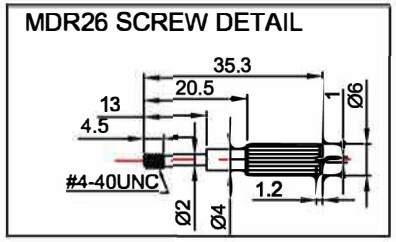

ORDER CODE	LENGTH
AS-CBL-CL-MP-D-3M	3m
AS-CBL-CL-MP-D-5M	5m

NOTES:
1. PIN ASSIGNMENT SEE TO WIRE LIST.
2. ELECTRICAL TEST CONDITION:
   (a).100%OPEN,SHORT & MISWIRE TEST,
   (b). INSULATOR RESISTANCE:20 Mohm MIN.
   DC 300V 0.03~0.08sec.
   (c). CONTACT RESISTANCE:3~5 ohm MAX.
3. ALL CABLE MUST TEST OK AND WITH A CERTIFIED CARD. B

ITEM	QTY	PART NUMBER	DESCRIPTION
5	4		LABEL.
4		G0031 C	ALL CONNECTORS OVERMOLD BLACK PVC.
3	4	C0307	SCREW:#4-40UNC 6.0*35.3MM NICKEL PLATED.
2	2	10126-3000PE (A0497)	MDR26 MALE GOLD FLASH CONTACTS,BLACK INSULATOR.SOLDER TYPE.
1	1	E0782 H7324F-2	UL20276 (28AWG*1P+AM)*11PCS+24AWG*(2C+2D)+ FPP+FAM+BRAID OD:9.5MM,BLACK PVC JACKET. B

Active Silicon

REV.	DWG NO:	CY-S-0218
C	Camera Link cable ass. , PoCL	
DRAW,BY: Huang shenggen	Order Code: AS-CBL-CL-MP-D-xM	
CHECK,BY: Cao jiawei	SCALE	UNIT / SHEET
	FREE	mm / 1/1